

Accessories




Pressure Switch

Pressure Switch allows the sensing of high or low pressure thresholds. Use with Model 104170 Manifold Block. Features include:

- Water resistant
- External pressure adjustment with allen screw
- Can be wired normally open or normally closed
- Computer-compatible since it allows electrical current to flow or to be stopped.
- Meets NEMA 4 & 13 specifications



Model 104196

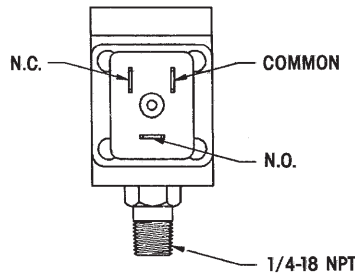

Performance Specifications

Models & Dimensions, in. (mm)

Medium:	Compressed Air
Max. Operating Pressure:	150 PSI (10.4 bar)
Adjustable Pressure Range:	20 to 100 PSI (1.4 to 6.9 bar)
Differential Pressure:	5 to 10 PSI (0.3 to 0.9 bar)
Operating Temperature Range:	-40° to 300° F
Weight:	11 oz.
Contact Type:	N.O./ N.C.
Contact Ratings:	5 Amps at 125 VDC 5 Amps at 250 VAC
Contact:	Silver Alloy wiping contact with snap action
Accuracy:	20% accuracy or better. Switch is ±2 or 5% of set point (whichever is greater)
Cycle Life:	1,000,000 plus
Thread:	1/4-18 NPT male

Ordering

MODEL	DESCRIPTION
104196	Switch only (without connector)
Coil Connectors	
104196-CHW	Switch with molded cable connector, 36" leads
104196-CSN	Switch with strain relief connector
104196-CDW	Switch with 1/2" conduit connector, 18" leads



104196-CHW



104196-CDW



104196-CSN